

Scanned Datasheet

Notice: You cannot copy or search the text in this PDF file, because this PDF file is converted from a scanned image of printed materials.

Resources

[Datasheet Archive - Datasheet & Application Note Search Engine](#)

[SupplyFrame - Datasheet & Application Note Search Engine](#)

Type No. AA118

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841



BKC International
Electronics Inc.

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

FEATURES

- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded


ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	90 Volts
Peak Forward Current	500 mA
Operating Temperature	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	90		V	25 °C
Reverse Current	I _r	100 V		80	μA	25 °C
Forward Voltage	V _f	5 mA		1	V	25 °C

MECHANICAL

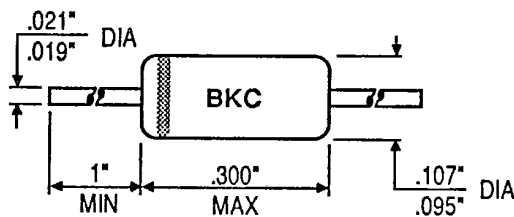

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.